


- Hydrostatic Test Pump supplied complete with tank, skid, handle & gauge
- Range of pressures available (see table below)
- Relief valve fitted as standard
- Compatible with a range of fluid media
- Hoses available on request

- Robust design
- 23Kg total dry weight
- Up to 1000 Bar working pressure
- 16 Litre capacity across the pressure range
- High pressure and low pressure stages with manual change over at pump

HTP – Manually Operated Hydrostatic Test Pumps

Model Number	H.P. Stage (bar)	H.P. Stage (psi)	L.P. Stage (bar)	L.P. Stage (psi)	L.P. Stage Displacement Per Stroke (cc)	H.P. Stage Displacement Per Stroke (cc)	Outlet Port	Suction Port
HTP110	110	1600	52	750	50.8	22.6	3/8" BSPP	3/8" BSPP
HTP170	172	2500				14.5		
HTP310	310	4500				8.1		
HTP440	448	6500				5.7		
HTP550	552	8000				4.6		
HTP700	700	10000				3.6		
HTP1000	1000	14500				2.5		



TANGYE – A division of Allspeeds Ltd
 Royal Works, Atlas Street
 Clayton-Le-Moors, Accrington, Lancashire. BB5 5LW
 UK Tel: +44 (0) 1254 615 100 Fax: +44 (0) 1254 615 199
 www.allspeeds.co.uk

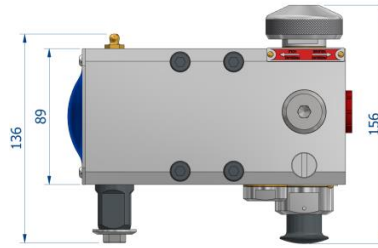

'PHO' RANGE OF PUMPS

UNIT WEIGHT - 4.9Kg

HANDLE LENGTH - 657MM
(NOT SHOWN)



Reservoir	
Part Number	Description
GHTK110	16 Litre reservoir with frame and fittings



Pressure Gauge Kits	
Part Number	Pressure Range (Bar)
GHTK110	0-110
GHTK400	0-400
GHTK700	0-700
GHTK1000	0-1000



Hose (3 metres)			
Part Number	End Fittings	For Use with Pump Models	Max. Working Pressure (Bar)
HHTP310	1/4" BSPP Female	HTP110, HTP170, HTP310	310
HHTP700	1/4" BSPP Female	HTP440, HTP550, HTP700	700
HHTP1000	1/4" BSPP Female	HTP1000	1000



TANGYE – A division of Allspeeds Ltd
 Royal Works, Atlas Street
 Clayton-Le-Moors, Accrington, Lancashire. BB5 5LW
 UK Tel: +44 (0) 1254 615 100 Fax: +44 (0) 1254 615 199
 www.allspeeds.co.uk